

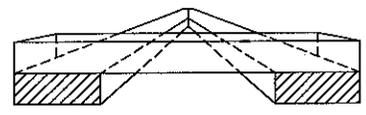


IMPORTANT PLEASE NOTE: All publications located within the Planning and Growth Management section of the web site are believed to be accurate as of their posting date. However, they may not be accurate on the day you view them. To verify whether these documents are the most current official document, please contact the division associated with the document in question.

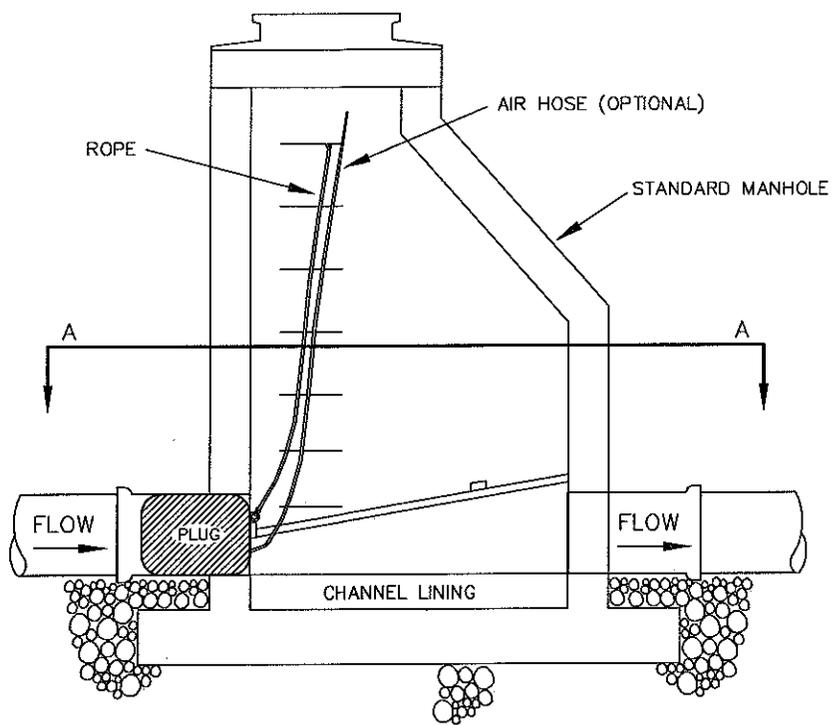

SECTION B-B

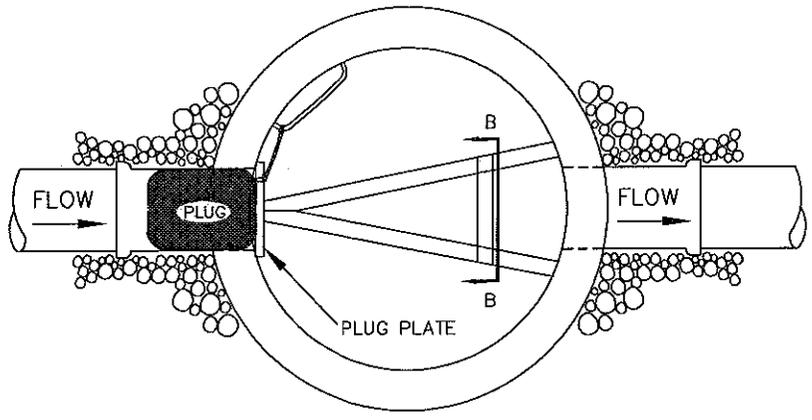

SECTION A-A

NOTES:

1. ALL PLUGS SHALL BE UTILIZED TO ISOLATE ALL DISCHARGE INTO CHARLES COUNTY'S SEWER SYSTEM. PLUGS SHALL BE UTILIZED FOR ALL SEWAGE BY PASS OPERATIONS.
2. ALL PLUGS SHALL BE PLACED IN THE UPSTREAM LINE OF THE MANHOLE AND SHALL BE SECURED WITH ROPE TIED TO TOP LADDER RUNG.
3. ALL PLUGS SHALL BE BRACED AS SHOWN WITH PRESSURE TREATED 2" X 4" WOOD AND ASSEMBLED USING 16 PENNY HOT DIPPED GALVANIZED FASTNERS. PLUG PLATE SHALL BE 1" LONGER THAN THE CORED OPENING DIAMETER IN THE MANHOLE AND REST FIRMLY AGAINST PLUG.
4. DEVELOPER/CONTRACTOR SHALL COORDINATE THE TIMING AND PLACEMENT OF ALL PLUGS WITH THE DEPARTMENT OF PLANNING AND GROWTH MANAGEMENT, CODES, PERMITS, AND INSPECTION SERVICES (PGM/CPIS) INSPECTOR. THE DEVELOPER/CONTRACTOR IS RESPONSIBLE FOR PUMPING OUT ANY MANHOLE/MAIN CONTAINING WATER.
5. UPON COMPLETION OF ALL OR PORTION OF THE SEWER SYSTEM AND UPON ACCEPTANCE (SUBSTANTIAL COMPLETION) BY PGM/CPIS AND PUBLIC WORKS UTILITIES, THE DEVELOPER/CONTRACTOR SHALL NOTIFY THE PGM/CPIS INSPECTOR TO COORDINATE THE REMOVAL OF THE PLUG(S).

CHARLES COUNTY GOVERNMENT

DEPARTMENT OF PLANNING & GROWTH MANAGEMENT

APPROVED: *[Signature]* 04/14/14
CHIEF OF CODES, PERMITS, & INSPECTION SERVICES DATE

[Signature] 04/14/14
WATER/SEWER ENGINEER DATE

STANDARD DETAIL

SEWER MAIN
 TEMPORARY PLUG

REVISIONS:

S
 1.13