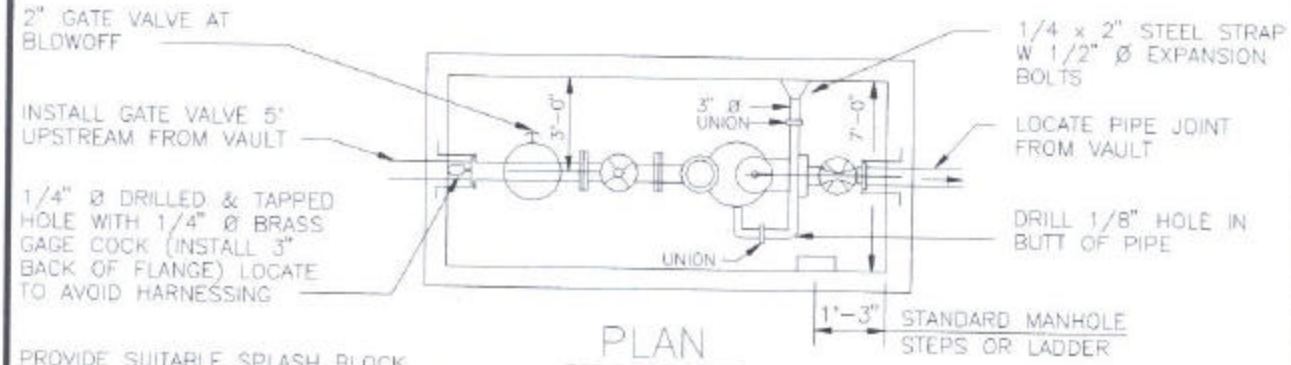

PLAN

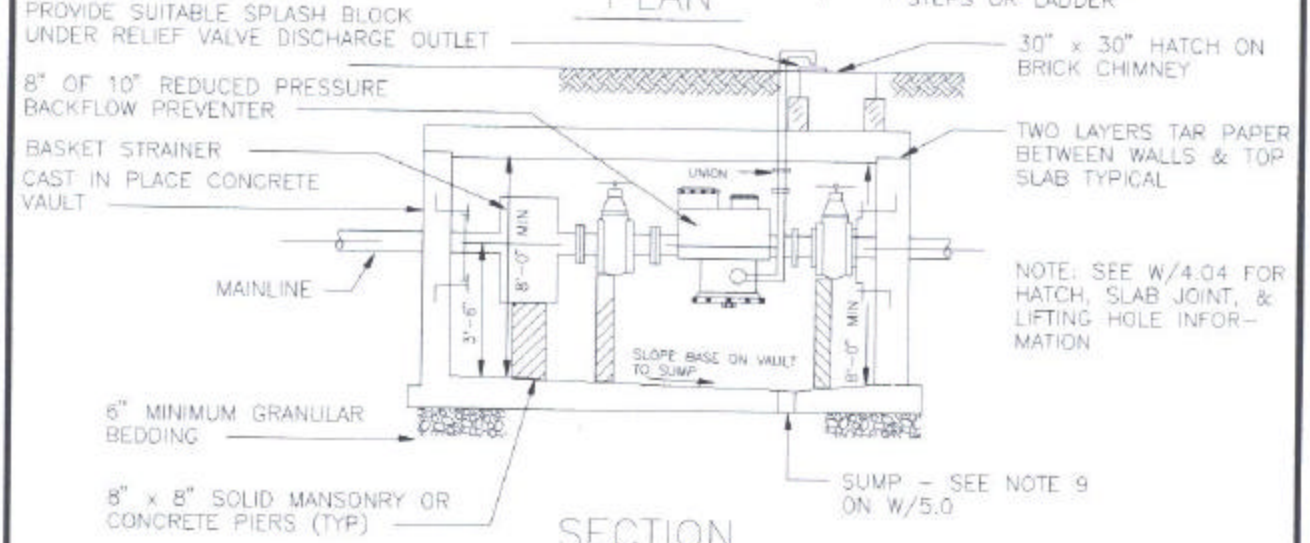

SECTION

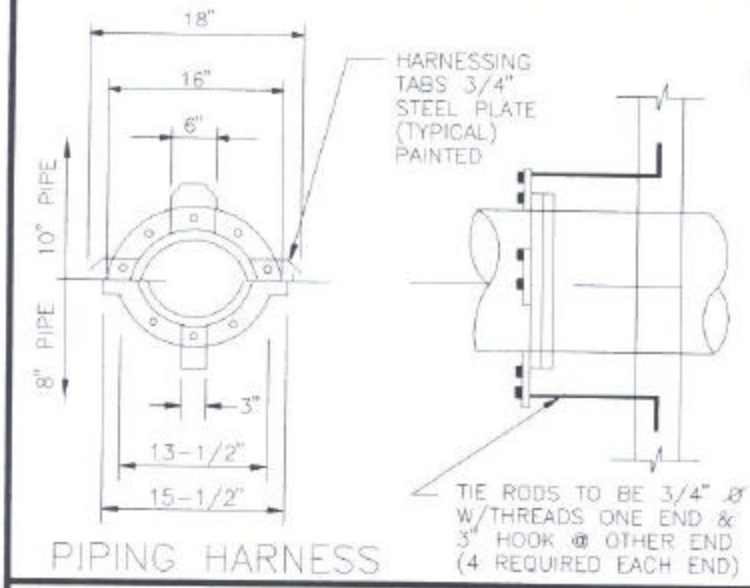

PIPING HARNESS

NOTES:

1. BACKFLOW PREVENTER TO BE INSTALLED BETWEEN METER & BUILDING.
2. ALL 8" & 10" PIPE TO BE DUCTILE IRON.
3. RELIEF VALVE DISCHARGE PIPE TO BE GALVANIZED IRON. PROVIDE SUPPORT AS NECESSARY.
4. FLUSH WATER LINE PRIOR TO INSTALLATION OF STRAINER AND BACK-FLOW PREVENTER.
5. THE PREFERRED LOCATION FOR THE BACKFLOW PERVENTER AND STRAINERS IS ABOVE GROUND IN THE BUILDING IT IS TO SERVE.

CHARLES COUNTY GOVERNMENT DEPARTMENT OF PLANNING & GROWTH MANAGEMENT APPROVED: 6/29/95 DIRECTOR OF DEVELOPMENT SERVICES DATE 6/29/95 WATER / SEWER ENGINEER DATE	STANDARD DETAIL INSTALLATION OF 8" & 10" REDUCED PRESSURE BACKFLOW PREVENTER, TYPE "B"	REVISIONS:	W 3.11