


SECOND ENTRANCE
STRONGLY RECOMMENDED
FOR VENTILATION,
LIGHTING AND SAFETY

CLEANOUT OUTSIDE INTERCEPTOR
TO BE LOCATED IN CONFORMANCE
WITH COMAR 09.04

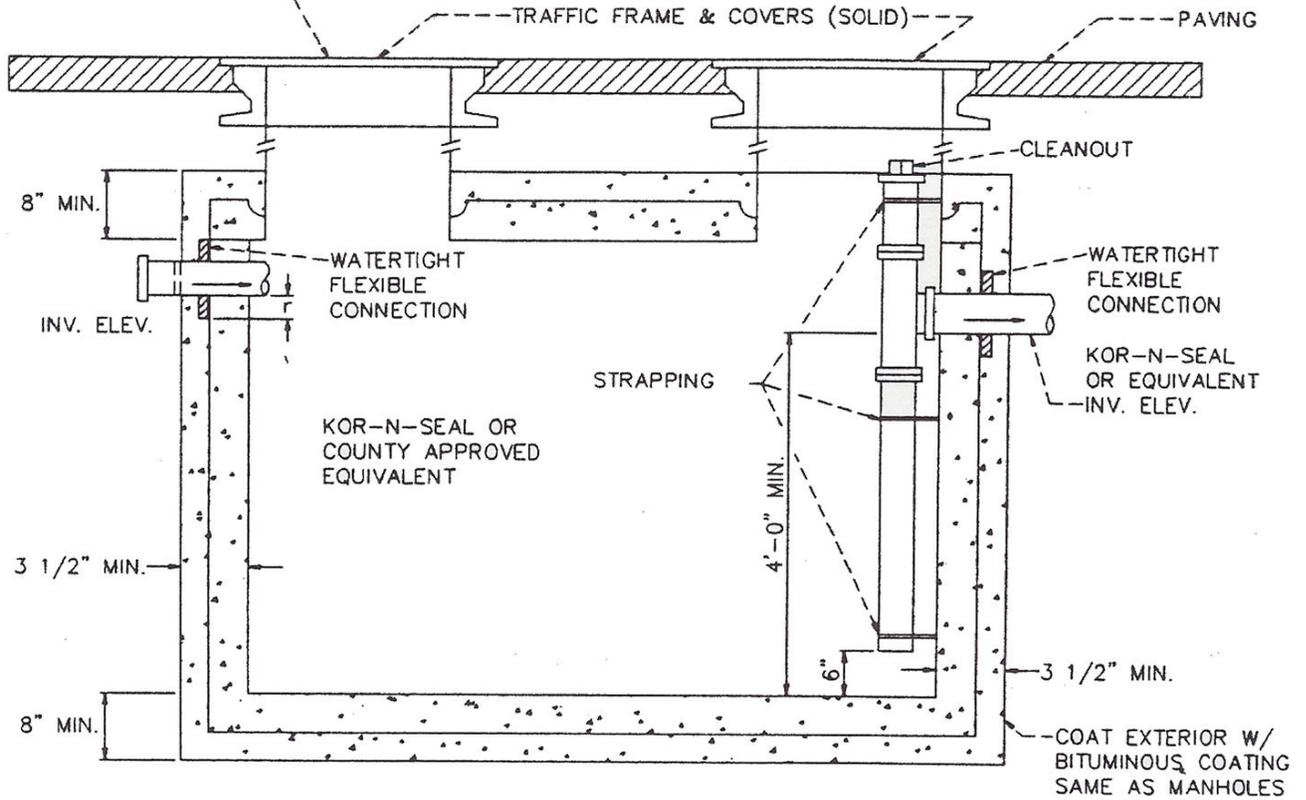

USE SCHEDULE 40 PVC PIPE AND FITTINGS

LARGER AS DIRECTED BY
WATER / SEWER ENGINEER
UPON REVIEW OF MENU ITEMS

2000 GAL. 301-400 SEATS

TANK AND ALL COMPONENTS SHALL BE DESIGNED FOR TRUCK LOADINGS (1-120).

NOTES:

(1) PROVIDE STRAPPING ON INTERIOR VERTICAL CLEANOUT STACK
STARTING AT 6" ON EACH END OF PIPE AND EVERY 3.0'.

CHARLES COUNTY GOVERNMENT

DEPARTMENT OF PLANNING & GROWTH MANAGEMENT

APPROVED:

[Signature] 6/29/95
DIRECTOR OF DEVELOPMENT SERVICES DATE

[Signature] 6/29/95
WATER / SEWER ENGINEER DATE

STANDARD DETAIL

OUTSIDE
GREASE TRAP

REVISIONS:

S
5.04