


PLAN

NOTES:

1. MOUNT FRAME/COVER ON MANHOLE CONE WITHOUT BRICK OR GRADE RING TRANSITION, AS SHOWN. TOP OF FRAME AND COVER SHALL BE SET 12" BELOW FINAL RIM ELEVATION SHOWN ON THE DRAWINGS.
2. IF SLOTTED INSERTS ARE USED DO NOT FILL WITH MORTAR.

S-3.01 NOTES #6 APPLY

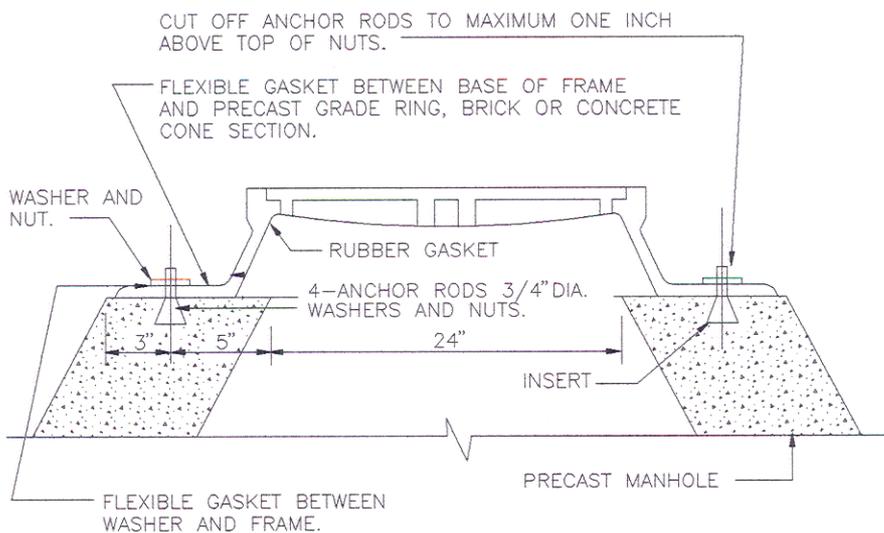

SECTION A

CHARLES COUNTY GOVERNMENT

DEPARTMENT OF PLANNING & GROWTH MANAGEMENT

APPROVED:

[Signature] 6/29/95
DIRECTOR OF DEVELOPMENT SERVICES DATE

[Signature] 6/29/95
WATER / SEWER ENGINEER DATE

STANDARD DETAIL

INTERM SETTING
 ANCHORING 24"
 WATERTIGHT FRAME
 & COVER TO MH WALL

REVISIONS:

S
 3.05

70